


Appearance and Dimensions

A	B	C	D	E	F	G	H	J	K	L	R	R1
4025	1826	1930	2300	330	1503	794	36°	35°	12°	117°	3310	5960



2.5t Telescopic Handlers

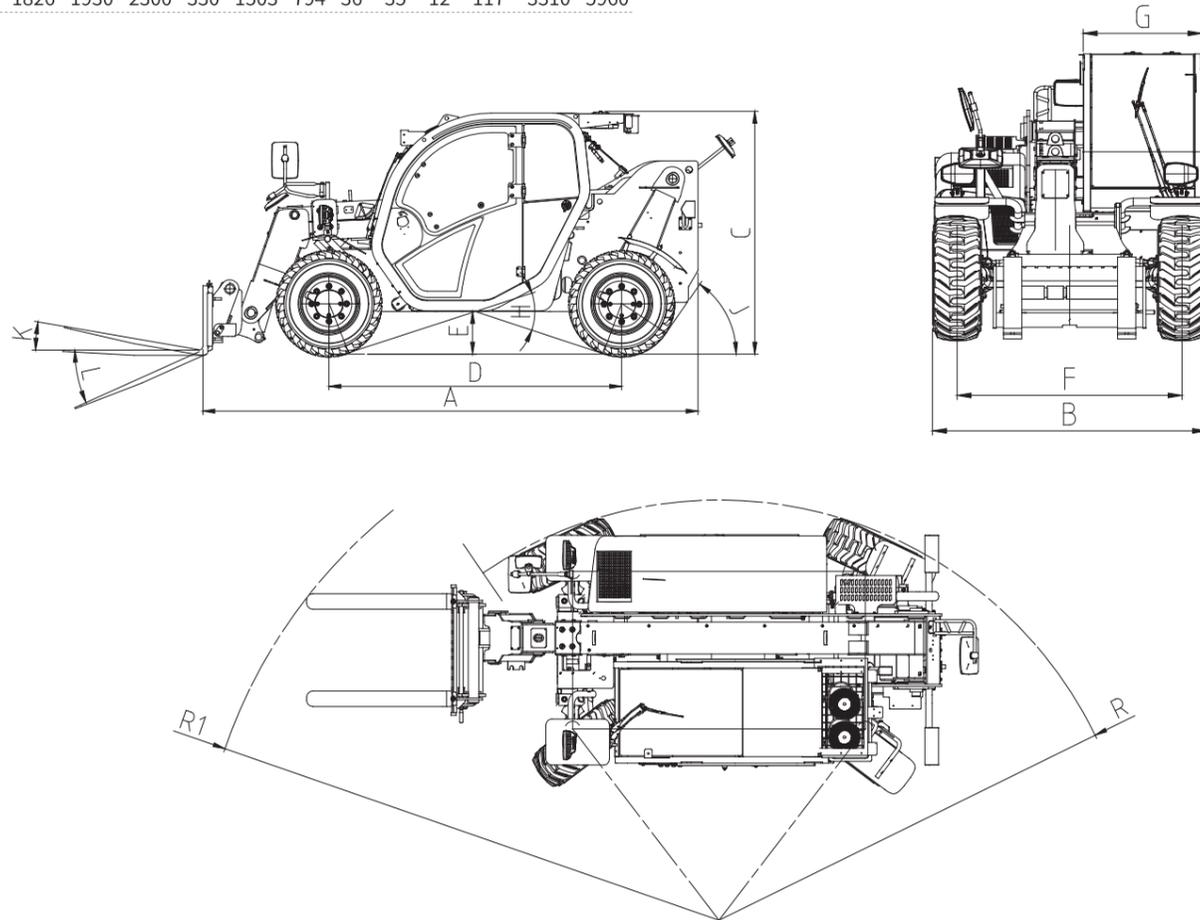

ANHUI HELI CO., LTD.

Add / No.668, FangXing Road, Hefei, China
 Fax / +86-551-63639966
 Tel / +86-551-63639068(America); 63639258(Europe);
 63639358(Asia); 63662105(Africa & Middle East)



Design&Print:Fokell Printing 20250923

- Maximum capacity:2500kg
- Maximum lifting height:5900mm
- Maximum horizontal extension:3300mm
- Transmission mode:Hydrostatic drive
- Steering mode:
four steering,front wheel steering,cab steering

* Our products are subject to improvements and changes without notice.



Lifting capacity

Maximum capacity	kg	2500
Maximum lifting height	mm	5900
Maximum horizontal extension	mm	3300
Transmission mode		Hydrostatic drive
Steering mode		Four steering, front wheel steering, cab steering
Weight	Kg	5020

Dimensions

A Overall length	mm	4025
B Overall width	mm	1826
C Overall height	mm	1930
D Wheel base	mm	2300
E Ground clearance	mm	330
F Front track	mm	1503
G Outside width of cab	mm	794
H Vehicle passing angle	°	36
J Vehicle departure angle	°	35
K Tilt angle of fork	°	12
L Tilt angle of fork	°	117
R Turning radius	mm	3310
R1 Turning radius	mm	5960

Engine

Manufacturer	Kubota	
Emission standard	Stage III	Euro V/US T4F
Model	V3307	
Displacement	3.331L	
Rated power/speed	55.4Kw@2600rpm	52.6Kw@2600rpm
Maximum torque/RPM	265N@ 1600rpm	285N@ 1500rpm

Attachments

- Loading bucket
- Sideshifters

25THCJ06-KU/KU1 Lifting diagram

